




ProgRes® C14^{plus}

CCD Research Camera - true color with microscanning

Image sensor	2/3" CCD progress. scan	Voltage supply	FireWire powered
CCD sensor type	Color	Power consumption	approx. 8 W
Sensor resolution [max]	1360 x 1024 pixel [1.4 Mpix ... 12.5 Mpix]	Ambient conditions	Temperature: +5 °C ... +35 °C, Humidity: 5 % ... 80 %, non condensing
Active sensor size [H x V]	8.8 mm x 6.6 mm	Storage conditions	Temperature: -10 °C ... +50 °C
Pixel size [W x H]	6.45 µm x 6.45 µm	Dimensions [L x W x H]	145 mm x 93 mm x 123 mm
A / D conversion	14 bit	Weight	approx. 800 g
Pixel clock	12 MHz 24.5 MHz	Application software	ProgRes® CapturePro for PC/ MAC (TWAIN for PC only)
Dynamic range	67 ... 69 dB	SDK	ProgRes® SDK for PC, LINUX, MAC
Exposure times	94 µs ... 600 s	External camera driver	available at: www.jenoptik.com/progres
Analog gain	1x ... 8x	Hardware requirements	PC: MS WIN XP/ Vista /WIN 7 Mac: OS X 10.4 or higher, 3 GHz CPU, 1 GB RAM, 256 MB graphics, FireWire a, Multicore recommended
Max. frame rate [image size]	13 fps [1360 x 1024 pixel] 51 fps [680 x 512 pixel]	It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.	
Image resolution	Binning: 3x, 5x (SDK) Microscan.: 4080 x 3072 2720 x 2048 True color: yes		
Cooling	yes		
Digital interface	FireWire a		
Optical connection	C-Mount (0.63x TV pref.)		
Trigger In / Out	yes		

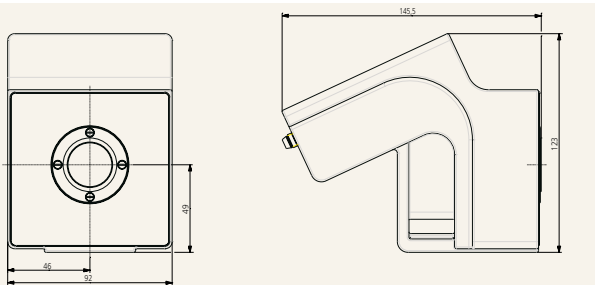

017953-301-99-14-0813-en

JENOPTIK | Optical Systems
 Optoelectronic Systems Business Unit
 JENOPTIK Optical Systems GmbH
 Goeschwitzer Strasse 25 | 07745 Jena | Germany
 Phone +49 3641 65-3083 | Fax -2144
progres.os@jenoptik.com | www.jenoptik.com/progres

Office USA:
 JENOPTIK Optical Systems, Inc.
 16490 Innovation Drive | Jupiter, FL 33478-6428 | USA
 Phone +1 561 628-8837

Optoelectronic Systems